058514-000 | FOSC450-B6-6-NT-0-B3V



Product Classification

Product Type

Regional Availability

Product Series
Product Brand

FOSC[™]450 B6 Fiber Optic Splice Closure, Gel Cable sealing, no pre-installed tray, 6 cable attach., three ground feedthrough lugs, with test valve

- Single-ended, O-ring sealed dome closure for splicing feeder and distribution cables
- Gel cable sealing technology allows easy adding or removing of a wide size range of cables
- Compatible with most common cable types: e.g. loose tube, central core, ribbon fiber
- FOSC splice trays hinged for access to any splice without disturbing other trays
- Closure can be used in aerial, pedestal and underground (up to 5 meters) environments
- Compatible with CommScope's CWDM modules and optical splitter trays

Single-ended, round fiber closure

Latin America | North America

FOSC 450 FOSC™

General Specifications

Splicing Type, SupportedMass fusion | Single fusion

Splicing Capacity, Mass Fusion, maximum 288
Splicing Capacity, Single Fusion, maximum 144
Color Black
Network Area Type Feeder
Package, quantity 1

Packaging Type Box | Carton

Splice Tray Included, quantity 0
Splicing Capacity, Single Splice, 12 fibers, maximum 144
Splicing Capacity, Single Splice, 6 fibers, maximum 72

Dimensions

Main Cable Diameter, maximum 25.00 mm

 Diameter
 254.00 mm | 10.00 in

 Diameter, with clamp
 291 mm | 11 in

 Length
 610.00 mm | 24.02 in


 Weight
 5.90 kg | 13.00 lb

Dimension Drawing





058514-000 | FOSC450-B6-6-NT-0-B3V

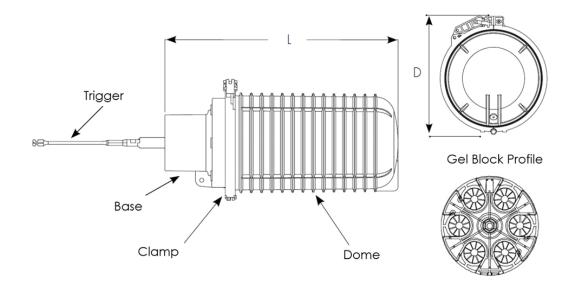

Mechanical Specifications

Cable Sealing Type Compressed gel

Cable Entry Drop Port StyleRoundCable Entry Main Port StyleRoundCable Ports, quantity6

Closure Sealing Type Dome-to-base clamp with O-ring

3

Closure Style Single-ended

Fiber Storage Basket TypeB6, BS standard size

Ground Feed-through Lugs, quantity

Material TypeImpact-resistant polymerMount TypePole | Strand | Wall

Environmental Specifications

Environmental SpaceBelow ground | BuriedQualification StandardIEC 61300, 5 m waterheadWater ResistanceFlash test valve at 5 psi (40 kPa)

Regulatory Compliance/Certifications

Agency Classification RoHS 2011/65/EU Compliant

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

page 2 of 3 September 11, 2019



058514-000 | FOSC450-B6-6-NT-0-B3V





page 3 of 3 September 11, 2019