


**PART NUMBER:**  
i2560-C-XX-2J


**NOTES:**  
1) SPC GR-326 GEOMETRIC REQUIREMENTS =>PROTRUSION/UNDERCUT:+50/-100mm

PERFORMANCE SPECIFICATIONS	
FIBER TYPE: MULTIMODE (50/125um)	
	850/1310nm
INSERTION LOSS	0.3dB
TYPICAL INSERTION LOSS	0.2dB
MATING DURABILITY (500 cycles)	<0.2dB
TEMPERATURE RANGE	-40° C to 85° C

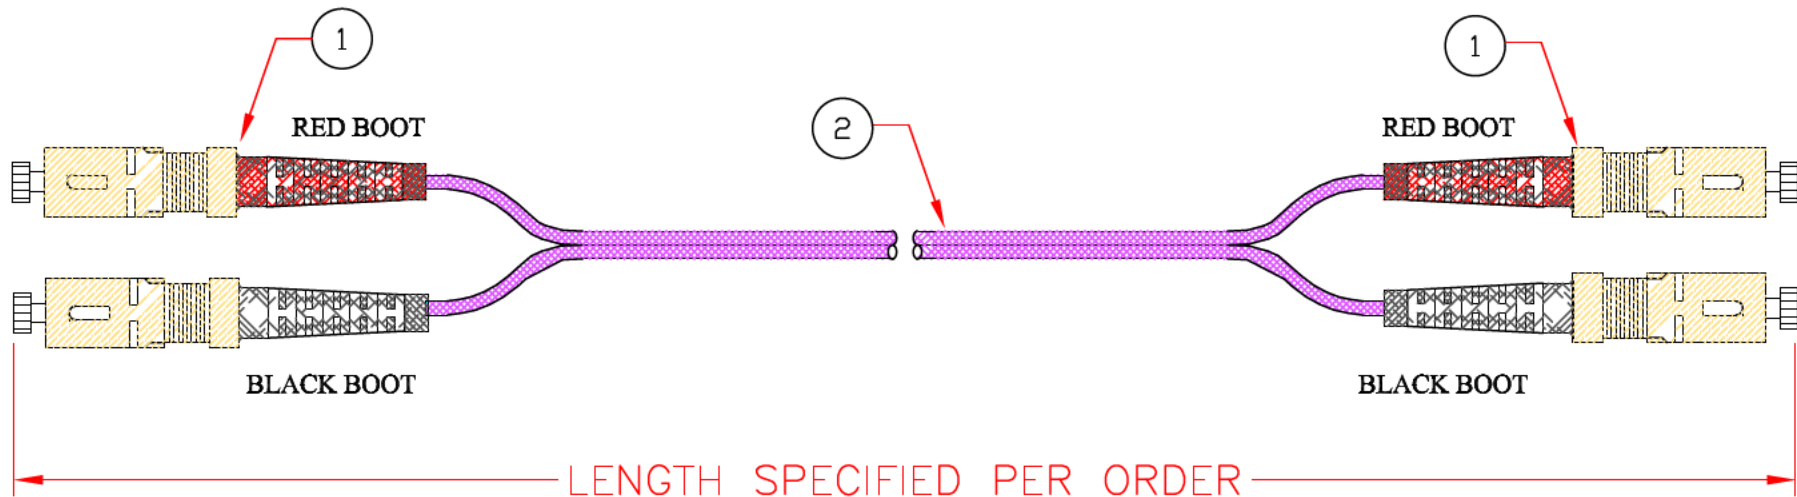

CORNING CLEARCURVE OPTICAL FIBER CABLE 50/125um ZIPCORD OFNR/OFNP 2mm

OM4+

ITEM	QTY.	DESCRIPTION	<b>PROPRIETARY AND CONFIDENTIAL</b> THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF iFIBER OPTIX, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.	DRAWN BY:	DATE:	 <b>iFIBER OPTIX, INC.</b> 14450 CHAMBERS RD. TUSTIN, CA 92780 www.ifiberoptix.com Tel: 714-665-9796 Fax: 714-665-9757
1	4	SC MULTIMODE 127um CONNECTOR		CHECKED BY:	DATE:	
2	1	CORNING MULTIMODE DUPLEX 50/125um, 10-GIG 2mm		APPROVED BY:	DATE:	
3		N/A				
4		N/A			<b>PART NUMBER:</b> i2560-C-XX-2J	<b>P/N; LEGEND</b> N = INCHES F = FEET M = METER