


PART NUMBER:
i1611-B-XX-2J

NOTES:
1) SPC GR-326 GEOMETRIC
REQUIREMENTS =>PROTRUSION/UNDERCUT:+50/-100nm

PERFORMANCE SPECIFICATIONS	
FIBER TYPE: MULTIMODE (62.5/125um)	
	850/1310nm
INSERTION LOSS	0.3dB
TYPICAL INSERTION LOSS	0.2dB
MATING DURABILITY (500 cycles)	<0.2dB
TEMPERATURE RANGE	-40° C to 85° C

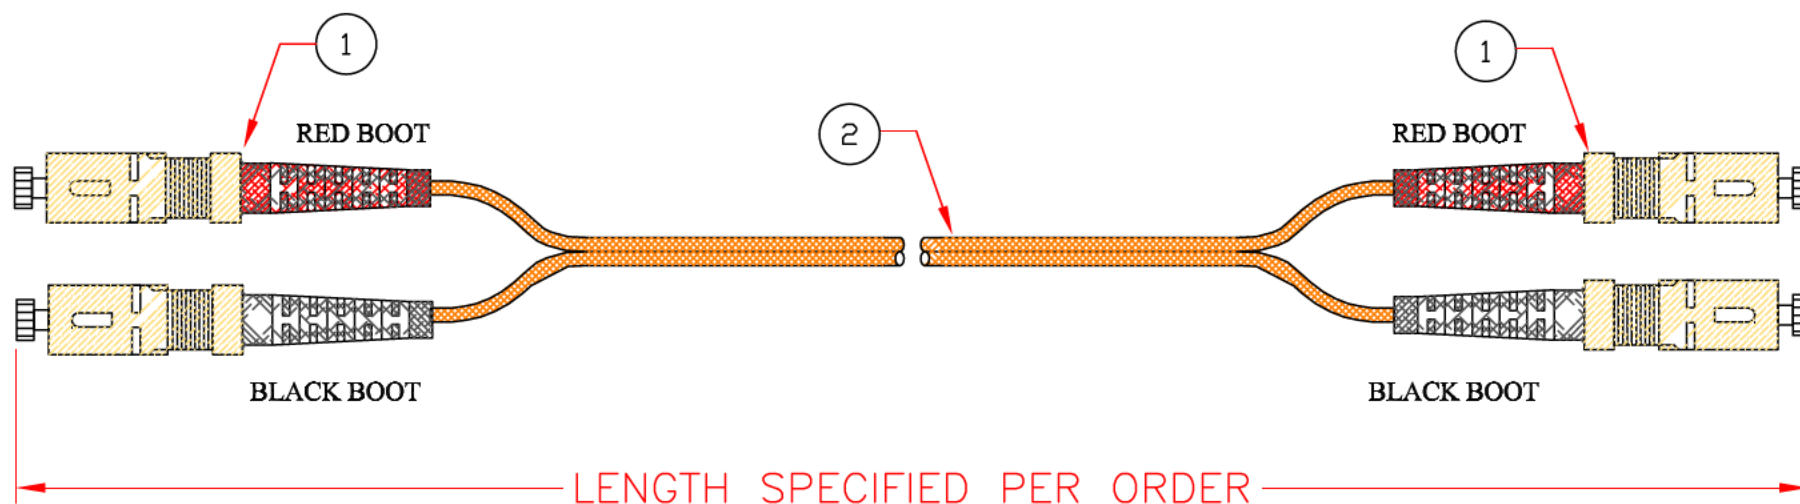

CORNING OPTICAL FIBER CABLE 62.5/125um ZIPCORD OFNR/OFNP 2mm

ITEM	QTY.	DESCRIPTION	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF iFIBER OPTIX, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.	DRAWN BY: LMS	DATE: JAN-02-2007	 iFIBER OPTIX, INC. 14450 CHAMBERS RD. TUSTIN, CA 92780 Tel: 714-665-9796 Fax: 714-665-9757 www.ifiberoptix.com
1	4	SC MULTIMODE 127um CONNECTOR		CHECKED BY: SANJEEV	DATE: JAN-02-2007	
2	1	CORNING MULTIMODE DUPLEX 62.5/125um OFNP 3mm		APPROVED BY: SANJEEV	DATE: JAN-02-2007	
3		N/A		TITLE: SC-SC MM DX		
4		N/A		62.5/125um PLENUM 3mm		
			PART NUMBER:		P/N: LEGEND	
			i1611-B-XX-2J		N = INCHES F = FEET M = METER	