



PART NUMBER:
i2753-B-XX-2J

NOTES:
1) SPC GR-326 GEOMETRIC REQUIREMENTS =>PROTRUSION/UNDERCUT:+50/-100nm

PERFORMANCE SPECIFICATIONS	
FIBER TYPE: SINGLEMODE (8.33/125um)	
	1310/1550nm
INSERTION LOSS	0.3dB
TYPICAL INSERTION LOSS	0.15dB
BACK REFLECTION	≤-55dB ABOVE
BACK REFLECTION (Typical)	≤-65dB ABOVE
MATING DURABILITY (500 cycles)	<0.2dB
TEMPERATURE RANGE	-40° C to 85° C

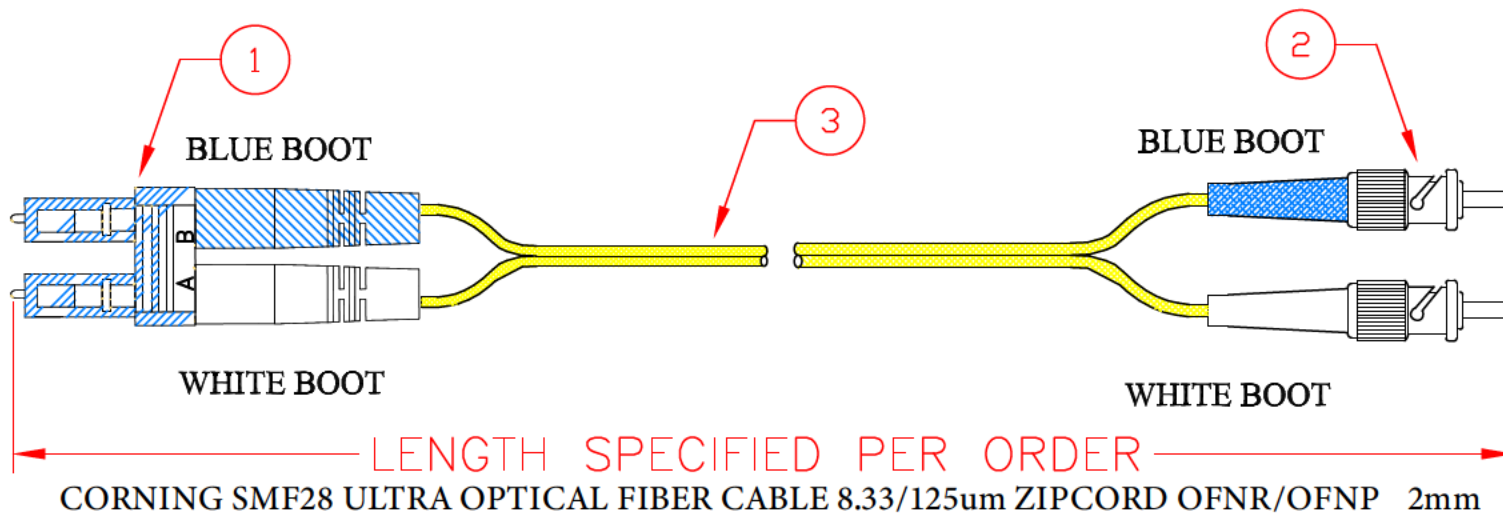

ITEM	QTY.	DESCRIPTION	PROPRIETARY AND CONFIDENTIAL. THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF IFIBER OPTIX, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.	DRAWN BY:	DATE:	 IFIBER OPTIX, INC. 14450 CHAMBERS RD. TUSTIN, CA 92780 www.ifiberoptix.com Tel: 714-665-9796 Fax: 714-665-9757
1	2	SENKO - LC/UPC SINGLEMODE DUPLEX 126um CONNECTOR		CHECKED BY:	DATE:	
2	2	IFIBER OPTIX - ST/UPC SINGLEMODE DUPLEX 126um CONNECTOR		APPROVED BY:	DATE:	
3	1	CORNING SINGLEMODE 8.33/125um 2mm		TITLE:	DATE:	
				ST/UPC-LC/UPC SM.DX 8.33/125um 2mm	PART NUMBER: i2753-B-XX-2J	P/N: LEGEND N = INCHES F = FEET M = METER