


PART NUMBER:
i2753-D-XX-2J

NOTES:
1) SPC GR-326 GEOMETRIC
REQUIREMENTS =>PROTRUSION/UNDERCUT:+50/-100nm

PERFORMANCE SPECIFICATIONS	
FIBER TYPE: SINGLEMODE (8.33/125um)	
	1310/1550nm
INSERTION LOSS	0.3dB
TYPICAL INSERTION LOSS	0.15dB
BACK REFLECTION	≤-55dB ABOVE
BACK REFLECTION (Typical)	≤-65dB ABOVE
MATING DURABILITY (500 cycles)	<0.2dB
TEMPERATURE RANGE	-40° C to 85° C

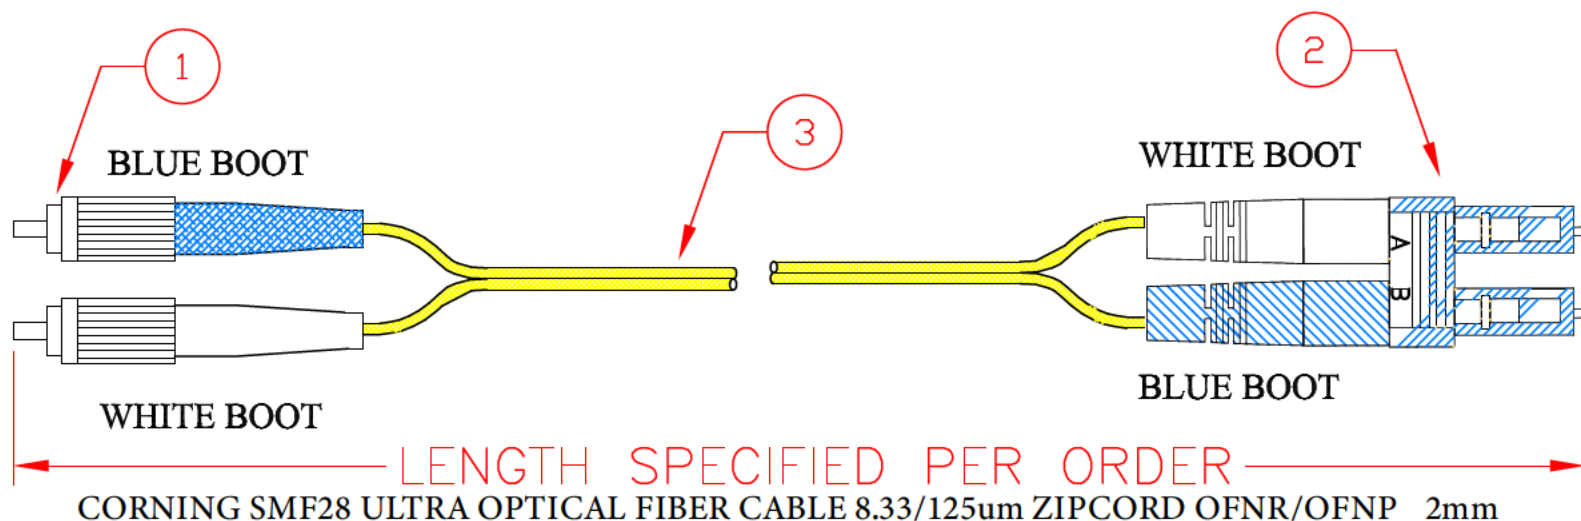

ITEM	QTY.	DESCRIPTION	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF iFIBER OPTIX, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.	DRAWN BY: LJL	DATE: JAN-02-2007	 iFIBER OPTIX, INC. 14450 CHAMBERS RD. TUSTIN, CA 92780 www.ifiberoptix.com Tel: 714-665-9796 Fax: 714-665-9757
1	2	FC/UPC SINGLEMODE 126um CONNECTOR		CHECKED BY: BANDREV	DATE: JAN-02-2007	
2	2	LC/UPC SINGLEMODE DUPLEX 126um CONNECTOR		APPROVED BY: BANDREV	DATE: JAN-02-2007	
3	1	CORNING SINGLEMODE DUPLEX 8.33/125um OFNR 3mm		TITLE: LC/UPC-FC/UPC SM DX 8.33/125um 2mm		
4	N/A	N/A				
PART NUMBER: i2753-D-XX-2J						P/N: LEGEND N = INCHES F = FEET M = METER