



PART NUMBER:
i2753-OO-XX-2J

NOTES:
 1) SPC GR-326 GEOMETRIC REQUIREMENTS =>PROTRUSION/UNDERCUT:+50/-100mm

PERFORMANCE SPECIFICATIONS	
FIBER TYPE: SINGLEMODE (8.33/125um)	
	1310/1550nm
INSERTION LOSS	0.3dB
TYPICAL INSERTION LOSS	0.15dB
BACK REFLECTION	≤-55dB ABOVE
BACK REFLECTION (Typical)	≤-65dB ABOVE
MATING DURABILITY (500 cycles)	<0.2dB
TEMPERATURE RANGE	-40° C to 85° C

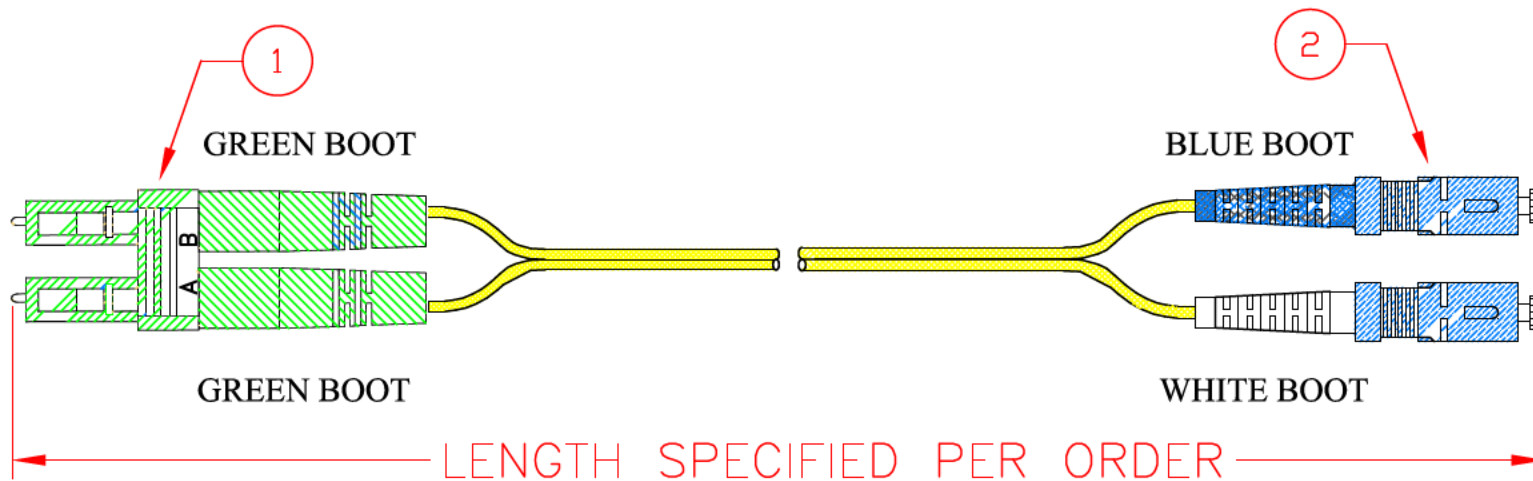

CORNING SMF28 ULTRA OPTICAL FIBER CABLE 8.33/125um ZIPCORD OFNR/OFNP 2mm

ITEM	QTY.	DESCRIPTION	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF iFIBER OPTIX, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.	DRAWN BY:	DATE:	 iFIBER OPTIX, INC. 14450 CHAMBERS RD. TUSTIN, CA 92780	www.ifiberoptix.com
1	2	LC/APC SINGLEMODE DUPLEX 126um CONNECTOR		CHECKED BY:	JAN-02-2007		Tel: 714-665-9796
2	2	SC/UPC SINGLEMODE 126um CONNECTOR		APPROVED BY:	JAN-02-2007		Fax: 714-665-9757
3	1	CORNING SINGLEMODE DUPLEX 8.33/125um OFNR 2mm		TITLE:	JAN-02-2007		
4	N/A	N/A	SC/UPC-LC/APC SM DX 8.33/125um OFNR 2mm	PART NUMBER: i2753-OO-XX-2J		P/N: LEGEND N = INCHES F = FEET M = METER	