


PART NUMBER:
i2570-I-XX-XJ


NOTES:
1) SPC GR-326 GEOMETRIC REQUIREMENTS =>PROTRUSION/UNDERCUT:+50/-100nm

PERFORMANCE SPECIFICATIONS	
FIBER TYPE: MULTIMODE (50/125um- om4)	
	850/1310nm
INSERTION LOSS	0.3dB
TYPICAL INSERTION LOSS	0.2dB
MATING DURABILITY (500 cycles)	<0.2dB
TEMPERATURE RANGE	-40° C to 85° C

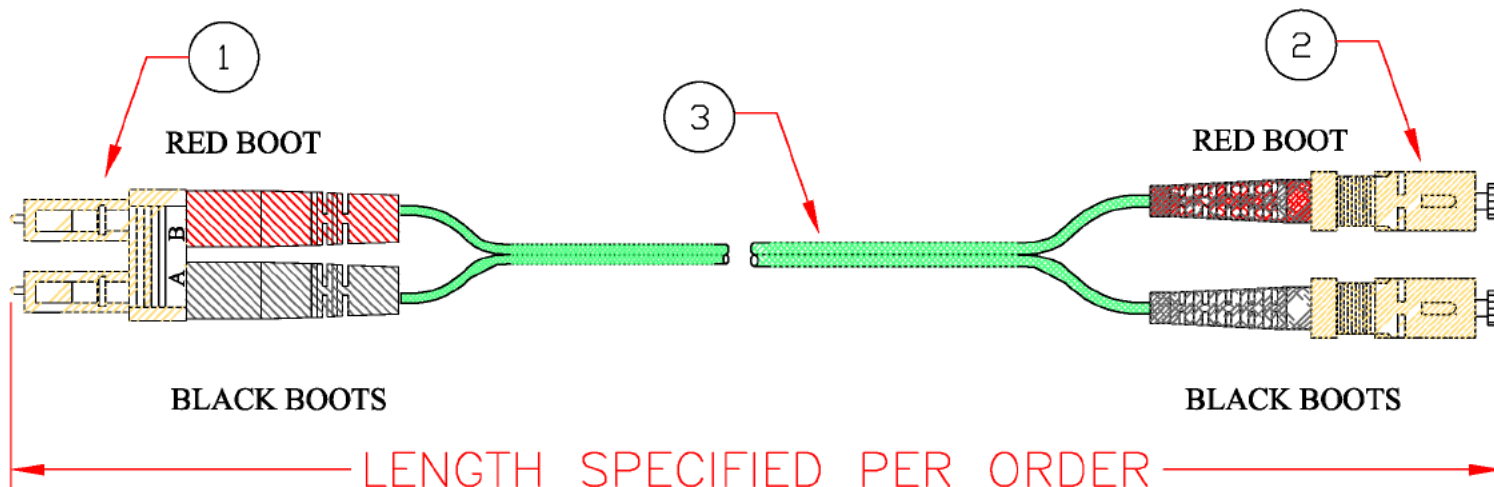

CORNING CLEARCURVE OPTICAL FIBER CABLE 50/125um ZIPCORD OFNR/OFNP
AVAILABLE IN 2.0, 1.8, 1.6, and 1.2mm

OM5

ITEM	QTY.	DESCRIPTION	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF iFIBER OPTIX, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.	DRAWN BY:	DATE:	 iFIBER OPTIX, INC. 14450 CHAMBERS RD. TUSTIN, CA 92780 www.ifiberoptix.com Tel: 714-665-9796 Fax: 714-665-9757	
1	2	LC DUPLEX MULTIMODE 127um CONNECTOR		CHECKED BY:	DATE:		
2	2	SC MULTIMODE 127um CONNECTOR		APPROVED BY:	DATE:		
3		CORNING MULTIMODE DX 50/125um, CLEAR CURVE, OM5 10-GIG		TITLE:			
4		N/A				PART NUMBER: i2570-I-XX-XJ	P/N: LEGEND N = INCHES F = FEET M = METER