


PART NUMBER:
i2750-H-XX-XJ

NOTES:
1) SPC GR-326 GEOMETRIC
REQUIREMENTS =>PROTRUSION/UNDERCUT:+50/-100nm

PERFORMANCE SPECIFICATIONS	
FIBER TYPE: SINGLEMODE (8.33/125um)	
	1310/1550nm
INSERTION LOSS	0.3dB
TYPICAL INSERTION LOSS	0.15dB
BACK REFLECTION	≤-55dB ABOVE
BACK REFLECTION (Typical)	≤-65dB ABOVE
MATING DURABILITY (500 cycles)	<0.2dB
TEMPERATURE RANGE	-40° C to 85° C

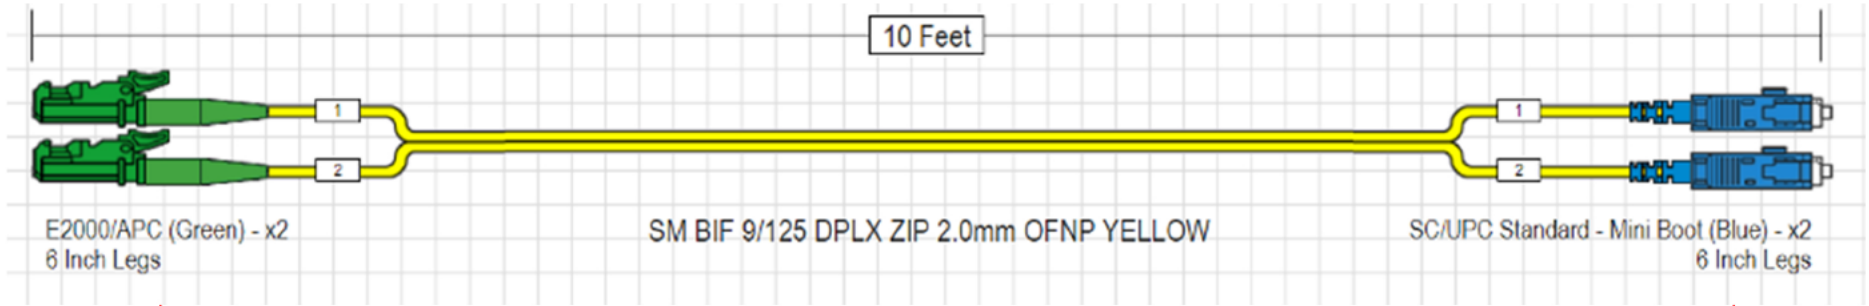

LENGTH SPECIFIED PER ORDER
CORNING SMF28 ULTRA OPTICAL FIBER CABLE 8.33/125um ZIPCORD OFNR/OFNP
AVAILABLE IN 2.0, 1.8, 1.6, and 1.2mm

ITEM	QTY.	DESCRIPTION
1	2	E2K/APC SINGLEMODE 126um CONNECTOR
2	2	SC/UPC SINGLEMODE DUPLEX 126um CONNECTOR
3	1	CORNING SINGLEMODE DUPLEX 8.33/125um OFNR 3mm
4	N/A	N/A

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF iFIBER OPTIX, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.		DRAWN BY: LUIS	DATE: JAN-02-2007
		CHECKED BY: SANJEEV	DATE: JAN-02-2007
		APPROVED BY: SANJEEV	DATE: JAN-02-2007
		TITLE: E2000/APC-SC SM DX 8.33/125um 2mm	

	iFIBER OPTIX, INC. 14450 CHAMBERS RD. TUSTIN, CA 92780	www.ifiberoptix.com Tel: 714-665-9796 Fax: 714-665-9757	
		PART NUMBER: i2750-H-XX-XJ	P/N: LEGEND N = INCHES F = FEET M = METER