


PART NUMBER:
i2753-II-XX-XJ

NOTES:
1) SPC GR-326 GEOMETRIC
REQUIREMENTS =>PROTRUSION/UNDERCUT:+50/-100nm

PERFORMANCE SPECIFICATIONS	
FIBER TYPE: SINGLEMODE (8.33/125um)	
	1310/1550nm
INSERTION LOSS	0.3dB
TYPICAL INSERTION LOSS	0.15dB
BACK REFLECTION	≤-55dB ABOVE
BACK REFLECTION (Typical)	≤-65dB ABOVE
MATING DURABILITY (500 cycles)	<0.2dB
TEMPERATURE RANGE	-40° C to 85° C

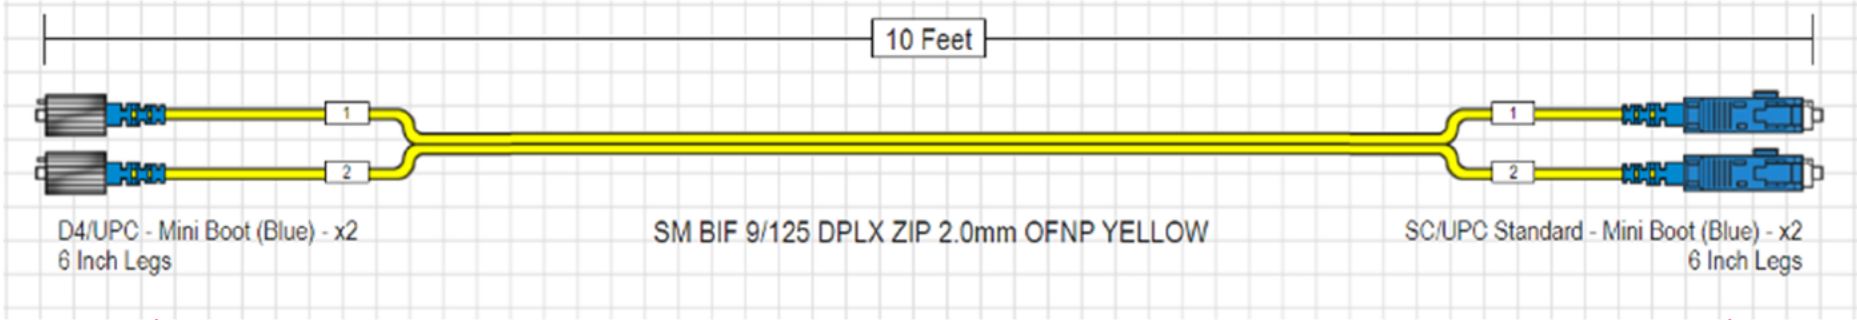

LENGTH SPECIFIED PER ORDER

CORNING SMF28 ULTRA OPTICAL FIBER CABLE 8.33/125um ZIPCORD OFNR/OFNP
AVAILABLE IN 2.0, 1.8, 1.6, and 1.2mm

ITEM	QTY.	DESCRIPTION	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF iFIBER OPTIX, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.	DRAWN BY: LUIS	DATE: JAN-02-2007	 iFIBER OPTIX, INC. 14450 CHAMBERS RD. TUSTIN, CA 92780 www.ifiberoptix.com Tel: 714-665-9796 Fax: 714-665-9757	PART NUMBER: i2753-II-XX-XJ	P/N: LEGEND N = INCHES F = FEET M = METER
1	2	D4/UPC SINGLEMODE 126um CONNECTOR		CHECKED BY: SANJEEV	DATE: JAN-02-2007			
2	2	SC/UPC SINGLEMODE DUPLEX 126um CONNECTOR		APPROVED BY: SANJEEV	DATE: JAN-02-2007			
3	1	CORNING SINGLEMODE DUPLEX 8.33/125um OFNR 3mm		TITLE:				
4	N/A	N/A		D4/UPC-SC/UPC SM DX 8.33/125um 2mm				