


PART NUMBER:
i2753-JJ-XX-XJ

NOTES:
 1) SPC GR-326 GEOMETRIC REQUIREMENTS =>PROTRUSION/UNDERCUT:+50/-100nm

PERFORMANCE SPECIFICATIONS	
FIBER TYPE: SINGLEMODE (8.33/125um)	
	<i>1310/1550nm</i>
INSERTION LOSS	0.3dB
TYPICAL INSERTION LOSS	0.15dB
BACK REFLECTION	≤-55dB ABOVE
BACK REFLECTION (Typical)	≤-65dB ABOVE
MATING DURABILITY (500 cycles)	<0.2dB
TEMPERATURE RANGE	-40° C to 85° C

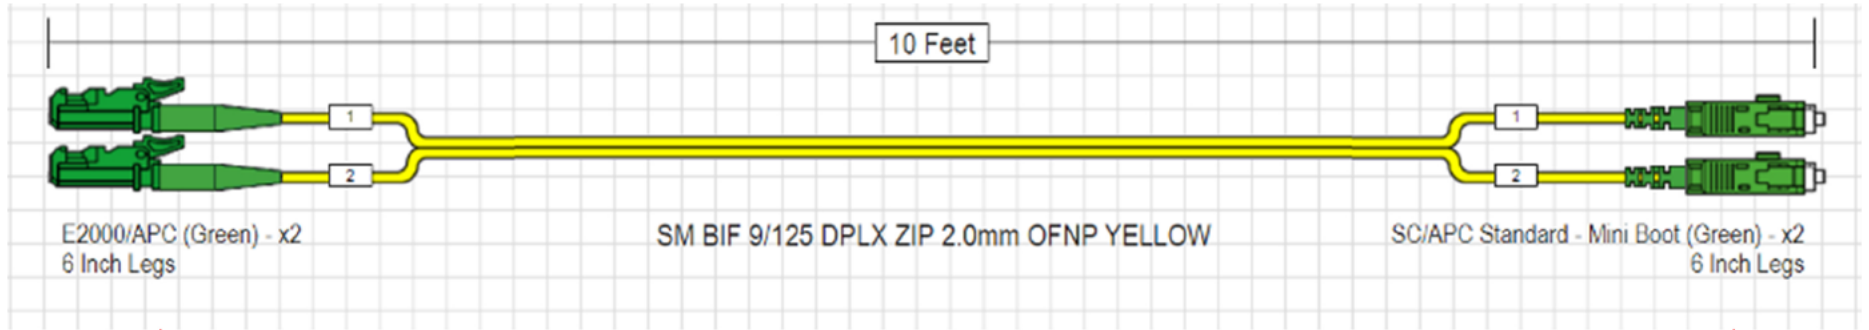

← LENGTH SPECIFIED PER ORDER →
 CORNING SMF28 ULTRA OPTICAL FIBER CABLE 8.33/125um ZIPCORD OFNR/OFNP
 AVAILABLE IN 2.0, 1.8, 1.6, and 1.2mm

ITEM	QTY.	DESCRIPTION
1	2	E2K/APC SINGLEMODE 126um CONNECTOR
2	2	SC/APC SINGLEMODE DUPLEX 126um CONNECTOR
3	1	CORNING SINGLEMODE DUPLEX 8.33/125um OFNR 3mm
4	N/A	N/A

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF iFIBER OPTIX, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.

DRAWN BY: LUIS	DATE: JAN-02-2007
CHECKED BY: SANJEEV	DATE: JAN-02-2007
APPROVED BY: SANJEEV	DATE: JAN-02-2007
TITLE: E2K/APC-SC/APC SM DX 8.33/125um 2mm	

iFiber Optix iFIBER OPTIX, INC.
 14450 CHAMBERS RD.
 TUSTIN, CA 92780
 www.ifiberoptix.com
 Tel: 714-665-9796
 Fax: 714-665-9757

PART NUMBER:
i2753-JJ-XX-XJ

P/N: LEGEND
 N = INCHES
 F = FEET
 M = METER