


PART NUMBER:
i2753-XX-XX-XJ

NOTES:
1) SPC GR-326 GEOMETRIC
REQUIREMENTS =>PROTRUSION/UNDERCUT:+50/-100nm

PERFORMANCE SPECIFICATIONS	
FIBER TYPE: SINGLEMODE (8.33/125um)	
	1310/1550nm
INSERTION LOSS	0.3dB
TYPICAL INSERTION LOSS	0.15dB
BACK REFLECTION	≤-55dB ABOVE
BACK REFLECTION (Typical)	≤-65dB ABOVE
MATING DURABILITY (500 cycles)	<0.2dB
TEMPERATURE RANGE	-40° C to 85° C

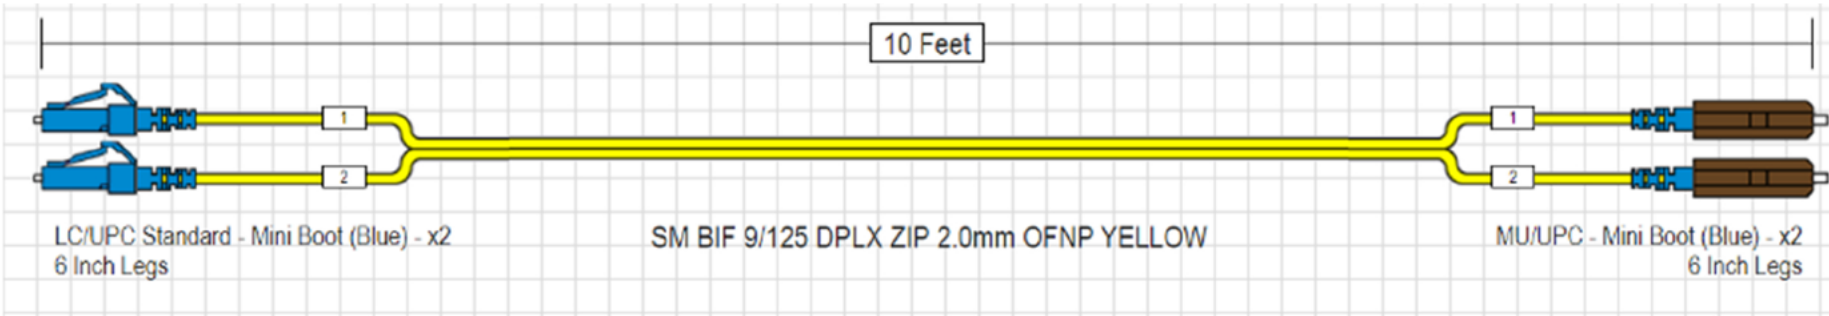

LENGTH SPECIFIED PER ORDER

CORNING SMF28 ULTRA OPTICAL FIBER CABLE 8.33/125um ZIPCORD OFNR/OFNP
AVAILABLE IN 2.0, 1.8, 1.6, and 1.2mm

ITEM	QTY.	DESCRIPTION
1	2	LC/UPC SINGLEMODE 126um CONNECTOR
2	2	MU/UPC SINGLEMODE DUPLEX 126um CONNECTOR
3	1	CORNING SINGLEMODE DUPLEX 8.33/125um OFNR 3mm
4	N/A	N/A

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
iFIBER OPTIX, INC. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION IS PROHIBITED.

DRAWN BY: LUIS	DATE: JAN-02-2007
CHECKED BY: SANJEEV	DATE: JAN-02-2007
APPROVED BY: SANJEEV	DATE: JAN-02-2007
TITLE: LC/UPC-MU/UPC SM DX 8.33/125um 2mm	



iFIBER OPTIX, INC.
14450 CHAMBERS RD.
TUSTIN, CA 92780

www.ifiberoptix.com
Tel: 714-665-9796
Fax: 714-665-9757

PART NUMBER:
i2753-XX-XX-XJ

P/N: LEGEND
N = INCHES
F = FEET
M = METER