



PERFORMANCE SPECIFICATIONS	
FIBER TYPE: Corning OS2 SMF-28 Ultra	
Wavelength	1310 & 1550nm
Insertion Loss	
MTP/APC Elite - Typical Insertion Loss	≤0.30dB
MTP Return Loss	≤0.60dB

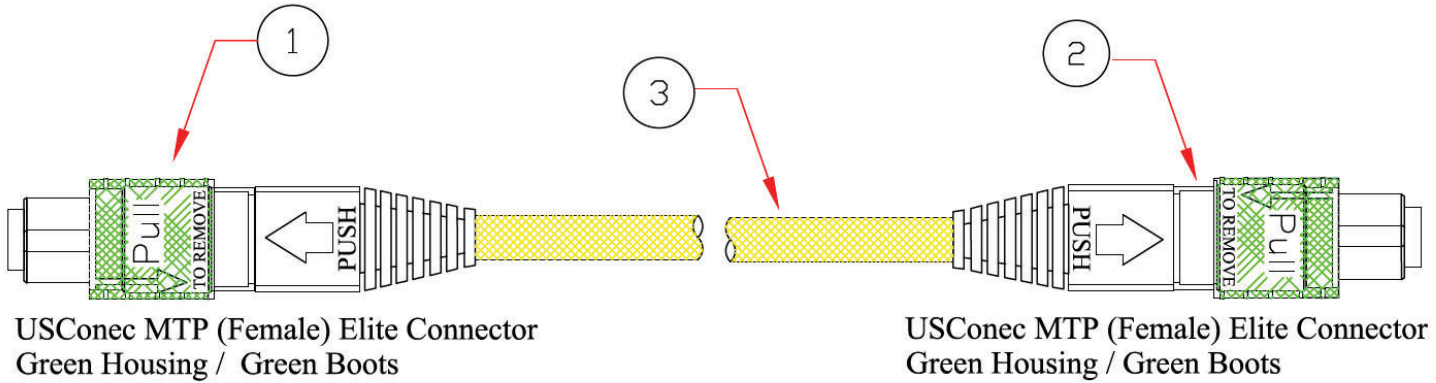

ITEM	QTY.	DESCRIPTION	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF iFIBER OPTIX, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.	DRAWN BY:	DATE:	 iFIBER OPTIX, INC. 14450 Chambers Rd., Tustin, CA 92780 www.ifiberoptix.com Tel: 714-665-9796 Fax: 714-665-9757
1	1	USConec MTP/APC (Female) Elite, Low Loss Connector		CHECKED BY:	DATE:	
2	1	USConec MTP/APC (Female) Elite, Low Loss Connector		APPROVED BY:	DATE:	
3		Corning OS2 SMF-28 Ultra, 24-Fiber Micro-Core, Yellow Jkt.		MTP/APC - MTP/APC SM 24F 8.5µm Indoor Micro-Core	DATE:	
			PART NUMBER:		12750-24MTPA-PRO-FF-15M-A 12750-24MTPA-PRO-FF-20M-A	